

# TALON ROOF

19°-32°-65° - diffused



solid  
white



Ibiza sand



meteor  
grey



timeless  
aluminium



Ceiling mounting luminaire.  
EN47100 die-cast aluminium  
base and extruded structure.

Powder polyester coated on  
treated layer to prevent  
corrosion, available in four  
standard

colours.

Characterized by retrofit optics  
and low luminance shield and  
tempered transparent  
silkscreened glass for Power  
Led model and sandblasted for  
Mid Power Led, mechanically  
fixed with silicon glue.

IP gel connector Kit and inox  
fixing clamp included.

Integrated Power Supply 220-  
240V 50/60Hz

Light source (8,2W led ) Power  
Led / (5,7W led ) Mid Power Led  
CRI $\geq$ 80 3000K/4000K





Power (5,8W e - 10,7W e )




BEAMS 19°-30°-55° DIFFUSED





CLASS I


IP65

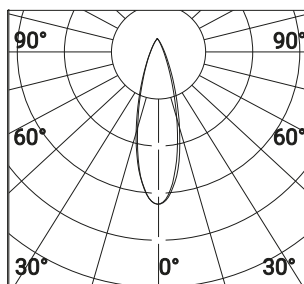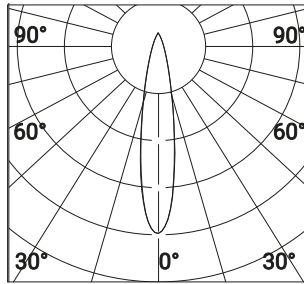

3000K	19°	8,2W <sub>led</sub>	10,7W <sub>e</sub>	796lm	220-240V
901111122	901111123	901111124	901111125		
					
901121122	901121123	901121124	901121125		
4000K	19°	8,2W <sub>led</sub>	10,7W <sub>e</sub>	836lm	220-240V



3000K	32°	8,2W <sub>led</sub>	10,7W <sub>e</sub>	800lm	220-240V
901111132	901111133	901111134	901111135		
					
901121132	901121133	901121134	901121135		
4000K	32°	8,2W <sub>led</sub>	10,7W <sub>e</sub>	840lm	220-240V

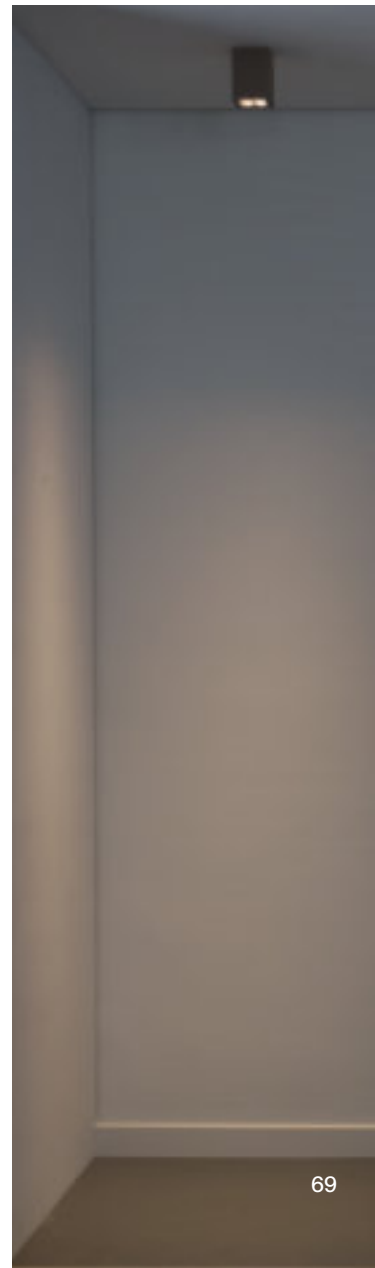








3000K 65° 8,2W<sub>led</sub> 10,7W<sub>e</sub> 760lm 220-240V

901111142 901111143 901111144 901111145



901121142 901121143 901121144 901121145

4000K 65° 8,2W<sub>led</sub> 10,7W<sub>e</sub> 798lm 220-240V

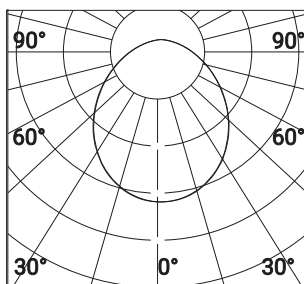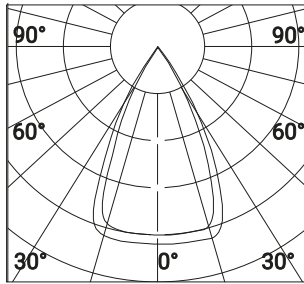

3000K diffused 4,8W<sub>led</sub> 5,8W<sub>e</sub> 506lm 220-240V

901111152 901111153 901111154 901111155



901121152 901121153 901121154 901121155

4000K diffused 4,8W<sub>led</sub> 5,8W<sub>e</sub> 531lm 220-240V

