

DIVAR WALL

32°

mono









lbiza sand

meteor grey

timeless aluminium

Wall mounting luminaire. EN47100 die-cast aluminium base and extruded structure, single or double emission. Powder polyester coated on treated layer to prevent corrosion, available in four standard colours. IP connectors and inox fixing clamp included.

Characterized by retrofit optics, low luminance shield and tempered transparent silkscreened glass for Power Led model, and sandblasted for Mid Power Led, mechanically fixed with silicon glue.

Integrated Power Supply 220-240V 50/60Hz


Light source (12,1W led) Power Led / (5,7W led) Mid Power Led CRI≥80 3000K/4000K

Power (29,7W e - 15,4W e - 7,2W e - 14W e)

BEAMS 32°

CLASS I

IP65

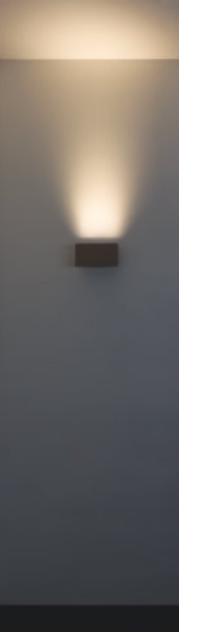

3000K	32°	12,1W led	15,4We	1177lm	220-240V
901011122	901011123	901011124		901011125	
901021122	901021123	901021124		901021125	
4000K	32°	12,1W _{led}	15,4We	1236lm	220-240V

