



DIVAR ROOF

19°- 32°-65°-diffused



solid
white



Ibiza
sand



meteor
grey



timeless
aluminium

Ceiling mounting luminaire.
EN47100 die-cast aluminium
base and extruded structure,
single or double emission.

Powder polyester coated on
treated layer to prevent
corrosion, available in four
standard colours. IP
connectors and inox fixing
clamp included.

Characterized by retrofit optics,
low luminance shield and
tempered transparent
silkscreened glass for Power
Led model and sandblasted for
Mid Power Led.

Integrated Power Supply 220-
240V 50/60Hz

Light source (12,1W led) Power
Led / (5,7W led) Mid Power Led
CRI \geq 80 3000K/4000K





Power (15,4W e - 7,2W e)




BEAMS 19°- 32°- 65°- DIFFUSO

CLASS I


IP65



3000K	19°	12,1W _{led}	15,4W _e	1177lm	220-240V
901011042	901011043	901011044	901011045		
					
901021042	901021043	901021044	901021045		
4000K	19°	12,1W _{led}	15,4W _e	1236lm	220-240V

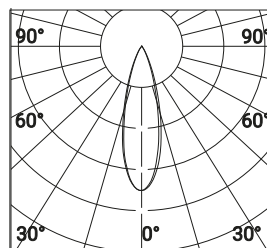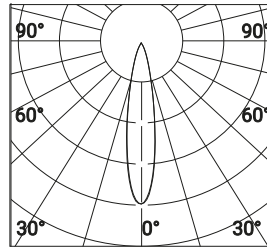



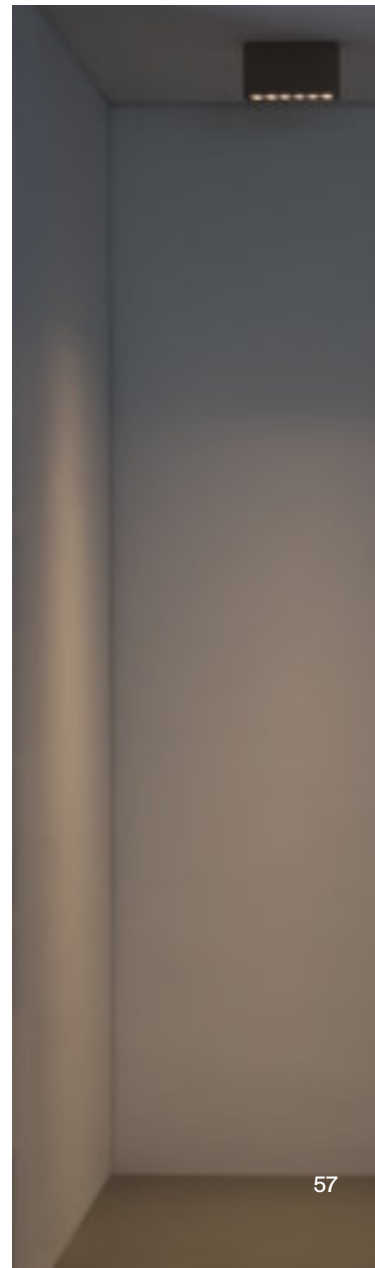




3000K	32°	12,1W _{led}	15,4W _e	1137lm	220-240V
901011062	901011063	901011064	901011065		
					
901021062	901021063	901021064	901021065		
4000K	32°	12,1W _{led}	15,4W _e	1194lm	220-240V









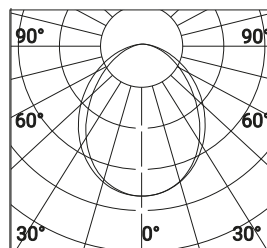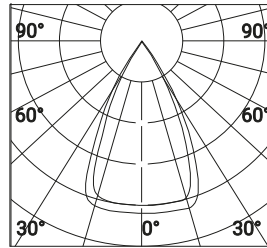

3000K	65°	12,1W _{led}	15,4W _e	1137lm	220-240V
901011072	901011073	901011074	901011075		
					
901021072	901021073	901021074	901021075		
4000K	65°	12,1W _{led}	15,4W _e	1194lm	220-240V



3000K	diffused	5,7W _{led}	7,2W _e	527lm	220-240V
901011052	901011053	901011054	901011055		
					
901021052	901021053	901021054	901021055		
4000K	diffused	5,7W _{led}	7,2W _e	553lm	220-240V

