

DIVAR WALL

19°

mono



solid
white



Ibiza
sand



meteor
grey



timeless
aluminium



Wall mounting luminaire.
EN47100 die-cast aluminium
base and extruded structure,
single or double emission.
Powder polyester coated on
treated layer to prevent
corrosion, available in four
standard colours. IP
connectors and inox fixing
clamp included.

Characterized by retrofit optics,
low luminance shield and
tempered transparent
silkscreened glass for Power
Led model, and sandblasted
for Mid Power Led,
mechanically fixed with silicon
glue.

Integrated Power Supply 220-
240V 50/60Hz


Light source (12,1W led) Power
Led / (5,7W led) Mid Power Led
CRI≥80 3000K/4000K

Power (29,7W e - 15,4W e - 7,2W
e - 14W e)

BEAMS 19° - 32° - 65° -
DIFFUSED

CLASS I

IP65

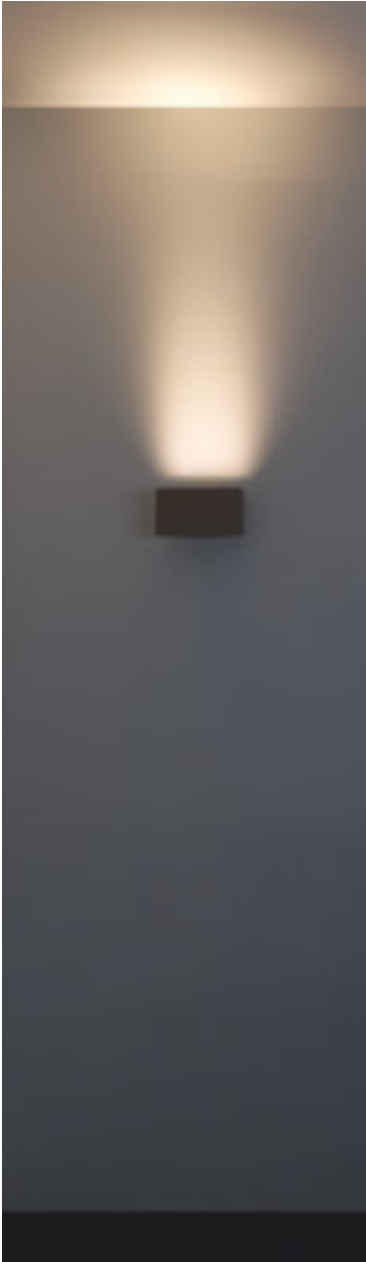

3000K	19°	12,1W _{led}	15,4W _e	1153lm	220-240V
901011012	901011013	901011014	901011015		
901021012	901021013	901021014	901021015		
4000K	19°	12,1W _{led}	15,4W _e	1211lm	220-240V

