



DX STEM

Ø38 - 36° - h60/160/500mm



anodized
aluminium



anodized
bronze

Projector suitable for ground installation. Turned anodized aluminium available in two sizes $\varnothing 38$ mm heights (h.60mm, h.160mm, h.500mm) or $\varnothing 54$ (h.70mm, h.170mm, h.510mm), extremely versatile due to adjustability and low luminance.

Natural aluminium, Bronze and black (for accessories only) surface anodizing treatment.

Tempered silkscreened transparent glass, mechanically fixed with silicon glue, aluminium Honeycomb.

Beams DX38 (18°;36°) DX54 (26°;52°)

Supply 24V remote power supply to be ordered, model DX54 also available operating 220-240V.


Light source $\varnothing 38$ mm (2 W_{led})
Power LED Power (3W_e)
 $\varnothing 54$ mm (6W_{led}) Multichip
Power Led Power (5,8W_{led}) and
(6,3W_e) Power (6,3 W_{led}) and
(6,9W_e @230V), CRI ≥ 80 ,
3000K/4000K

outgoing rubber cable
L.1000mm suitable for external
use with IP Heat-shrink tube
connector for IP connection
and plastic spike.

CLASS III,I

IP65

Accessories Tube Frame
(90117-90157) Eyelid frame
(90127-90167) and remote
power supplies to be
separately ordered.

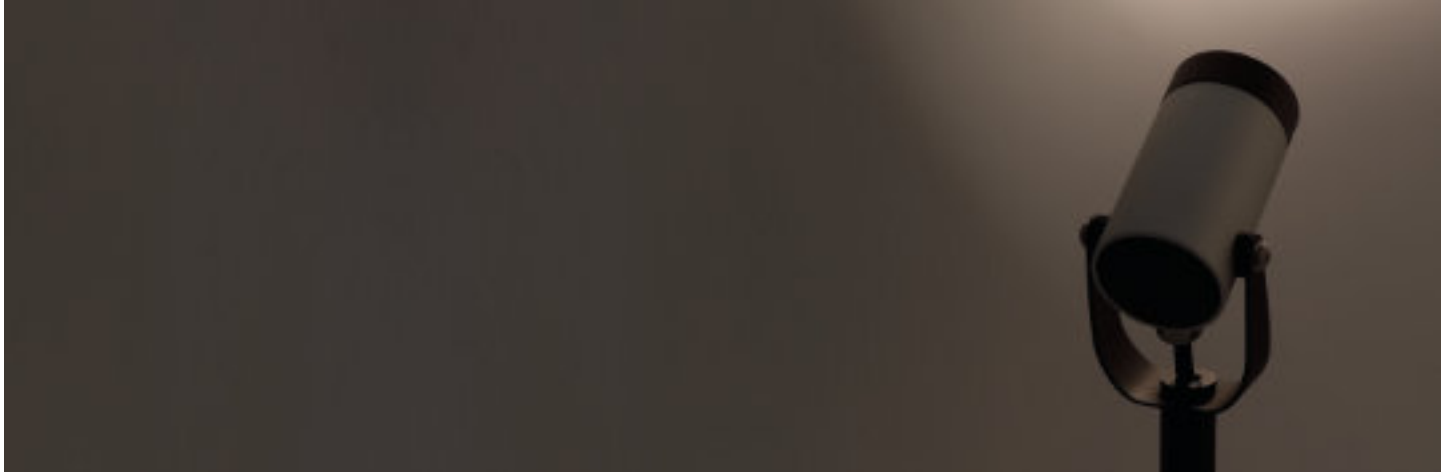

h60mm



3000K Ø38 36° 2W_{led} 3W_e 72lm 24V

900412086 900412089



900422086 900422089

4000K Ø38 36° 2W_{led} 3W_e 88lm 24V



h160mm



3000K Ø38 36° 2W_{led} 3W_e 72lm 24V

900412096 900412099



900422096 900422099

4000K Ø38 36° 2W_{led} 3W_e 88lm 24V

h500mm



3000K Ø38 36° 2W_{led} 3W_e 72lm 24V

900412106 900412109



900422106 900422109

4000K Ø38 36° 2W_{led} 3W_e 88lm 24V

