

MIRÒN 16

30°- 65°- STREET - ASYMMETRIC



solid
white



Ibiza
sand



meteor
grey



timeless
aluminium



Projector for wall, solid surface,
or pole installation.

Structure and cover EN47100
die-cast aluminium. Powder
polyester coated on treated
layer to prevent corrosion,
available in four standard
colours.

16 Led model has 30° and 65°
lens, asymmetric or street
beam.

Tempered silkscreened
transparent glass mechanically
fixed with silicon glue.

Integrated Power Supply 220-
240V 50/60Hz.

Light source (16,8W led) Power
Led CRI \geq 80 3000K/4000K,
Power (18,6W e).

Inox fixing clamp housed in the
reversible cover.




CLASS I

IP65


Accessories to be separately
ordered double or single
brackets: L.150mm (90214,
90215, 90234, 90235) or
L.400mm (90224,
90225,90244, 90245)suitable
for poles \varnothing 76mm and pole
connector \varnothing 60mm (90255).




3000K	30°	16,8W _{led}	18,6W _e	2216lm	220-240V
900511002	900511003	900511004	900511005		
900521002	900521003	900521004	900521005		
4000K	30°	16,8W _{led}	18,6W _e	2326lm	220-240V

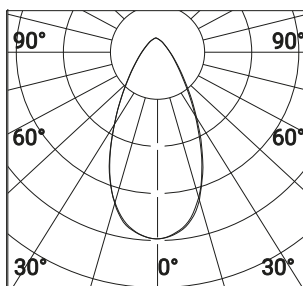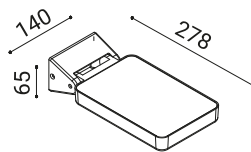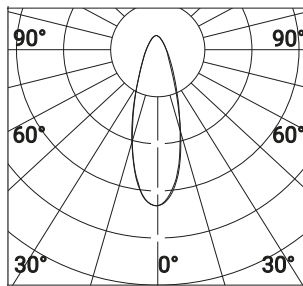

3000K	65°	16,8W _{led}	18,6W _e	2249lm	220-240V
900511012	900511013	900511014	900511015		
900521012	900521013	900521014	900521015		
4000K	65°	16,8W _{led}	18,6W _e	2361lm	220-240V

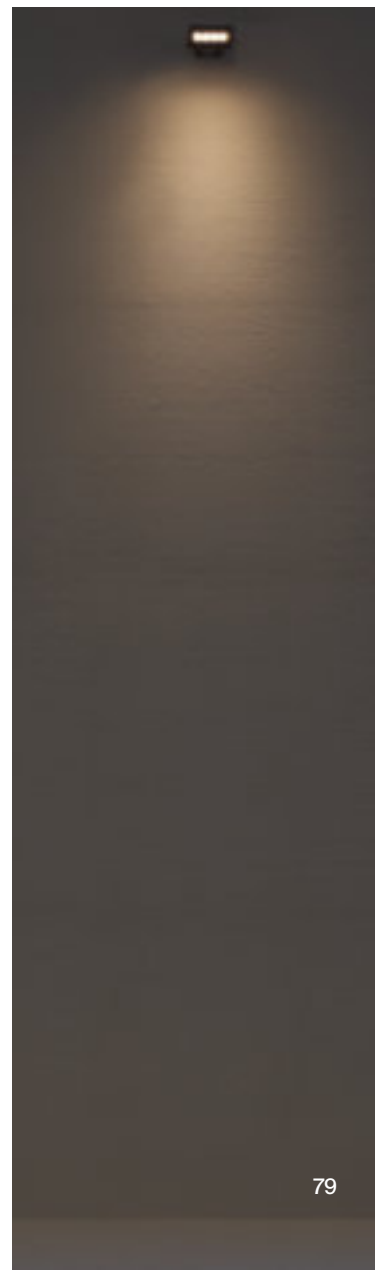



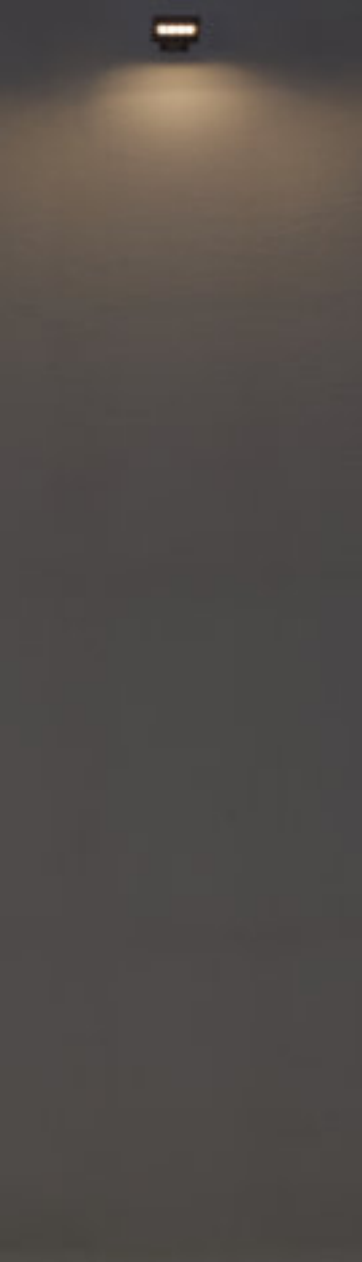





3000K asymmetric 16,8W_{led} 18,6W_e 1663lm 220-240V

900511022 900511023 900511024 900511025



900521022 900521023 900521024 900521025

4000K asymmetric 16,8W_{led} 18,6W_e 1746lm 220-240V

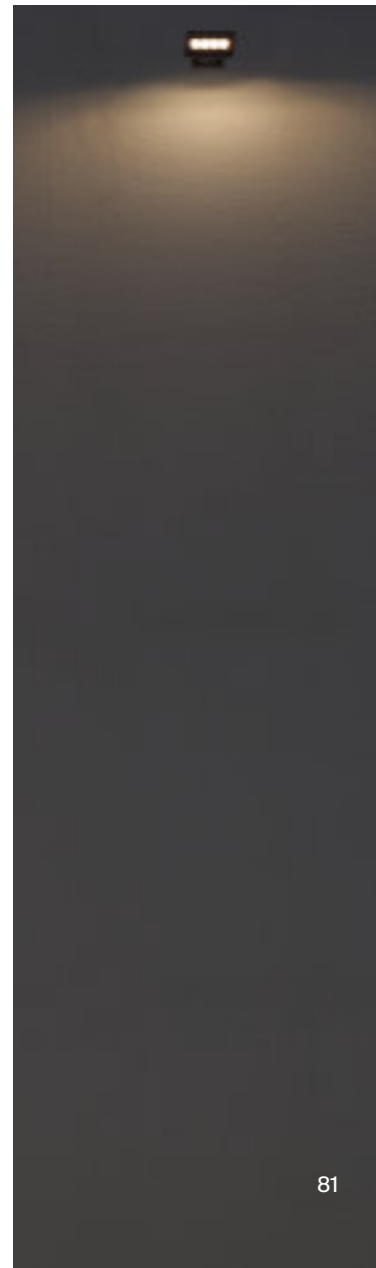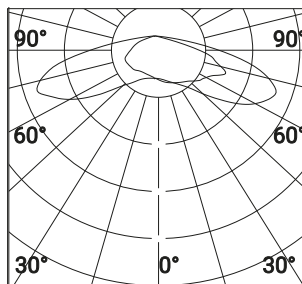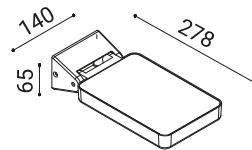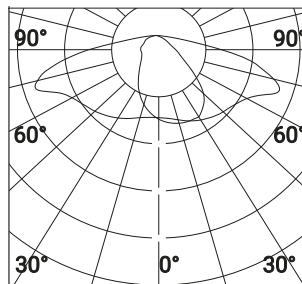

3000K street 16,8W_{led} 18,6W_e 2026lm 220-240V

900511032 900511033 900511034 900511035



900521032 900521033 900521034 900521035

4000K street 16,8W_{led} 18,6W_e 2127lm 220-240V

MIRÒN 24

30°- 65°- STREET - ASYMMETRIC



solid
white



Ibiza
sand



meteor
grey



timeless
aluminium



Projector for wall, solid surface, or pole installation. Structure and cover EN47100 die-cast aluminium. Powder polyester coated on treated layer to prevent corrosion, available in four standard colours.

24 Led model has 30° and 65° lens, asymmetric or street beam.

Tempered silkscreened transparent glass mechanically fixed with silicon glued.

Integrated Power Supply 220-240V 50/60Hz.

Light source (36W led) Power Led $CRI \geq 80$ 3000K/4000K, Power (40,2W e).

Inox fixing clamp housed in the reversible cover.

CLASS I

IP65

Accessories to be separately ordered double or single brackets: L.150mm (90214, 90215, 90234, 90235) or L.400mm (90224, 90225, 90244, 90245) suitable for poles $\varnothing 76$ mm and pole connector $\varnothing 60$ mm (90255).






3000K 30° 36W_{led} 40,2W_e 4736lm 220-240V

900511052 900511053 900511054 900511055



900521052 900521053 900521054 900521055

4000K 30° 36W_{led} 40,2W_e 4985lm 220-240V

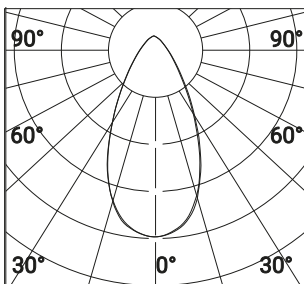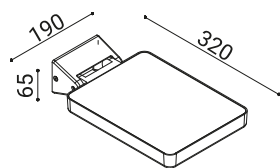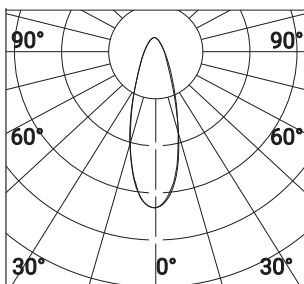


3000K 65° 36W_{led} 40,2W_e 4805lm 220-240V

900511062 900511063 900511064 900511065




900521062 900521063 900521064 900521065




4000K 65° 36W_{led} 40,2W_e 5058lm 220-240V

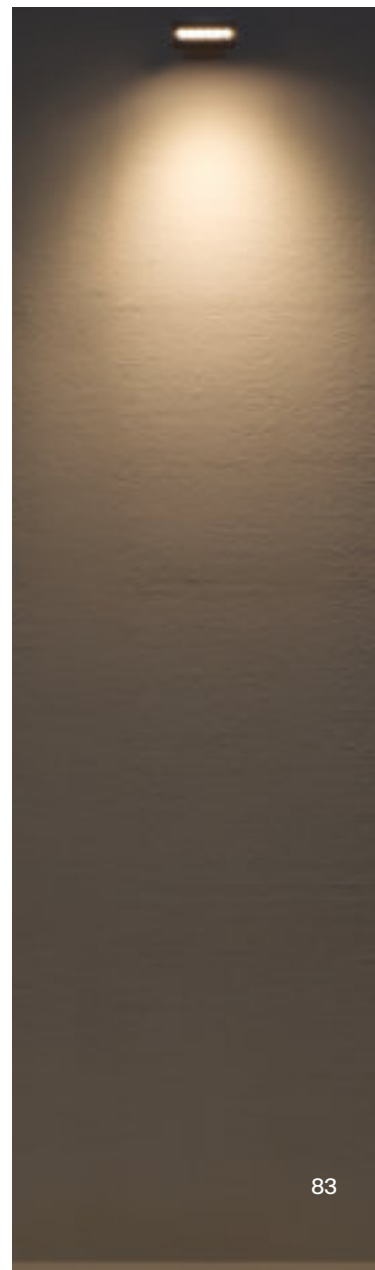




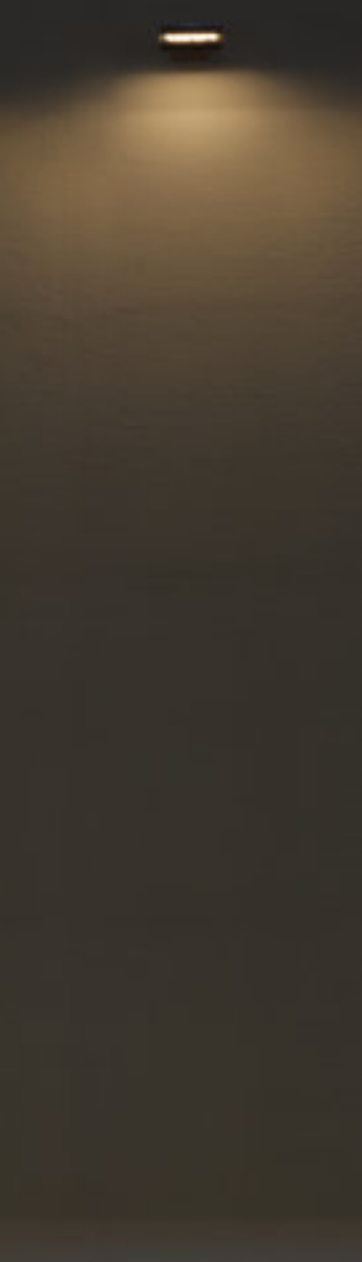

3000K	asymmetric	36W _{led}	40,2W _e	3553lm	220-240V
900511072	900511073	900511074	900511075		
900521072	900521073	900521074	900521075		
4000K	asymmetric	36W _{led}	40,2W _e	3740lm	220-240V

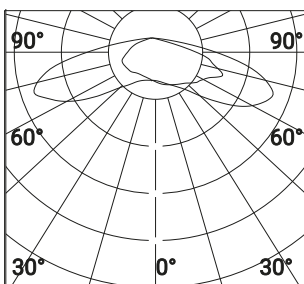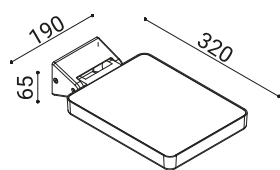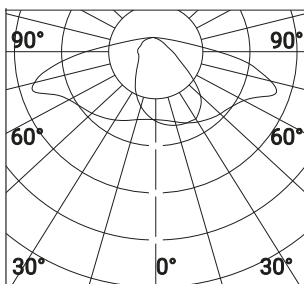


3000K	street	36W _{led}	40,2W _e	4330lm	220-240V
900511082	900511083	900511084	900511085		
900521082	900521083	900521084	900521085		
4000K	street	36W _{led}	40,2W _e	4558lm	220-240V

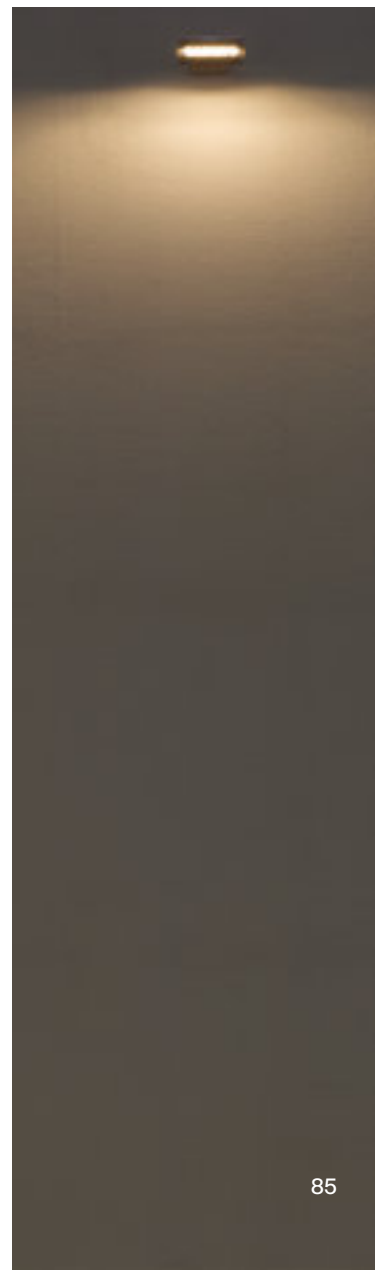







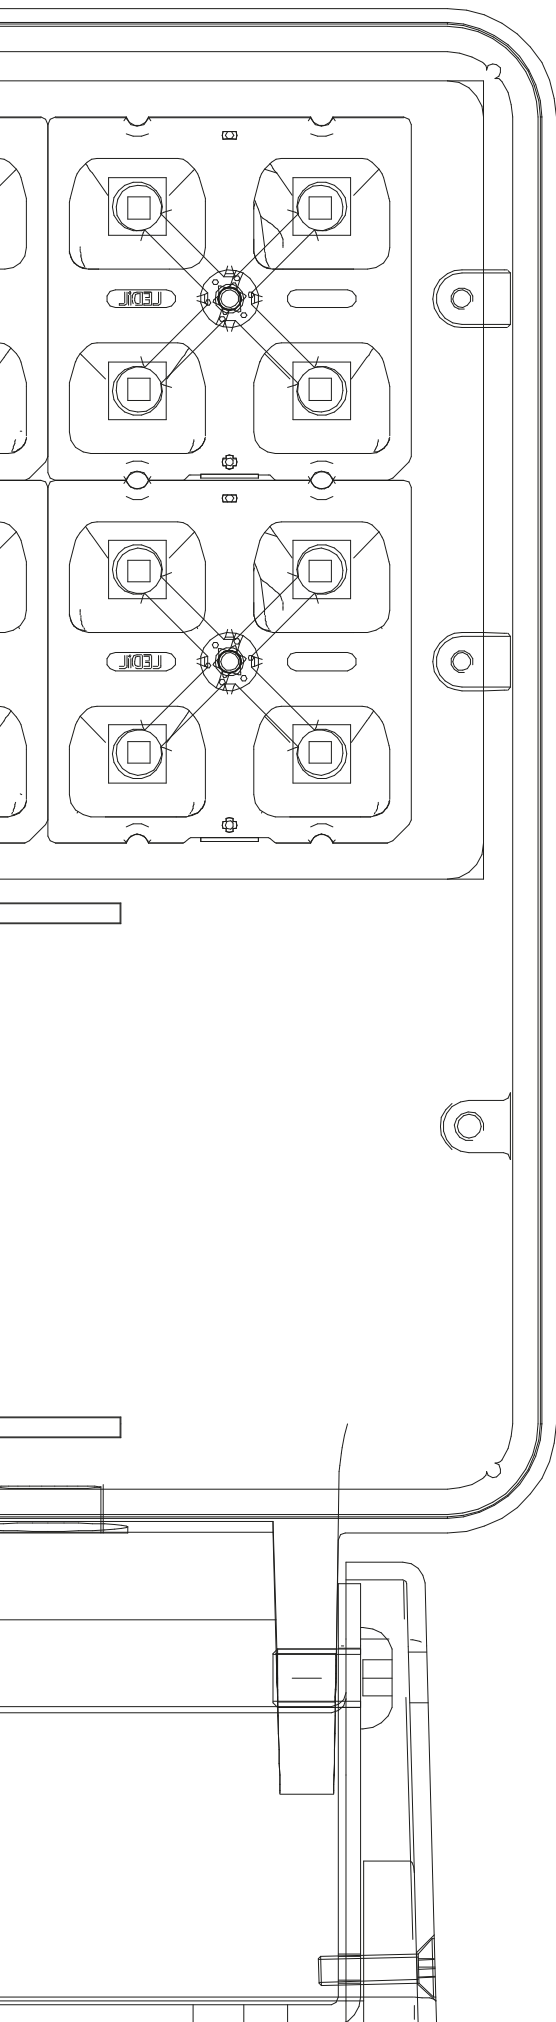

ACCESSORIES



BRACKET Ø76 L150mm

90214



90215



DOUBLE BRACKET Ø76 L150mm

90234



90235



BRACKET Ø76 L400mm

90224



90225



DOUBLE BRACKET Ø76 L400 mm

90244



90245



POLE CONNECTOR Ø60

90255



We are constantly looking for a light
that guides us on how to change the
world.



