

SOFIA

h160-500-800mm

360°



solid
white



Ibiza
sand



meteor
grey



Timeless
aluminium



Bollard for solid surface installation. Head section made of EN47100 die-cast aluminium, machining aluminium base and three sizes pole of extruded aluminium H.160mm, H.500mm, H.800mm.

Powder polyester coated on treated layer to prevent corrosion, available in four standard colours.

Tempered transparent glass fixed with silicon glue.

Integrated Power Supply 220-240V, phase cut dimming

light source MID Power Led ,
CRI ≥80, 3000K/4000K

power (10W e @230V)

360° diffused downward
emission

IP connector kit included

CLASS I

IP65

emission180° shield (9045), IP
connectors (9004) (9005) to be
separately ordered.



h160mm



3000K	h160mm	10W@230V	689lm 220-240V
-------	--------	----------	----------------

901217002	901217003	901217004	901217005
-----------	-----------	-----------	-----------



901227002	901227003	901227004	901227005
-----------	-----------	-----------	-----------

4000K	h160mm	10W@230V	723lm 220-240V
-------	--------	----------	----------------




h500mm



3000K	h500mm	10W@230V	689lm 220-240V
-------	--------	----------	----------------

901217012	901217013	901217014	901217015
-----------	-----------	-----------	-----------



901227012	901227013	901227014	901227015
-----------	-----------	-----------	-----------

4000K	h500mm	10W@230V	723lm 220-240V
-------	--------	----------	----------------



h800mm






3000K	h800mm	10W@230V	689lm 220-240V
-------	--------	----------	----------------

901217022	901217023	901217024	901217025
-----------	-----------	-----------	-----------



901227022	901227023	901227024	901227025
-----------	-----------	-----------	-----------

4000K	h800mm	10W@230V	723lm 220-240V
-------	--------	----------	----------------

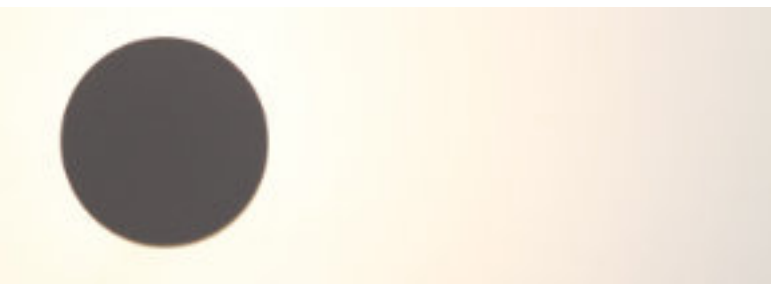

SOFIA spike

h160-500-800mm

360°



solid
white



Ibiza
sand



meteor
grey



Timeless
aluminium



Bollard for ground installation.
Head section made of
EN47100 die-cast aluminium ,
fiberglass reinforced plastic
spike and three sizes pole of
extruded aluminium H.160mm,
H.500mm, H.800mm.

Powder polyester coated on
treated layer to prevent
corrosion, available in four
standard colours.

Tempered transparent glass
fixed with silicon glue.

Integrated Power Supply 220-
240V, phase cut dimming

light source MID Power Led ,
CRI ≥80, 3000K/4000K

power(10W e @230V)

360° downward emission

IP connector kit included

CLASS I

IP65

Emission 180° shield (9045), IP
connectors (9004) (9005) to be
separately ordered.



h160mm



3000K	h160mm	10W@230V	689lm 220-240V
901217032	901217033	901217034	901217035



901227032	901227033	901227034	901227035
-----------	-----------	-----------	-----------


4000K	h160mm	10W@230V	723lm 220-240V
-------	--------	----------	----------------



h500mm



3000K	h500mm	10W@230V	689lm 220-240V
901217042	901217043	901217044	901217045

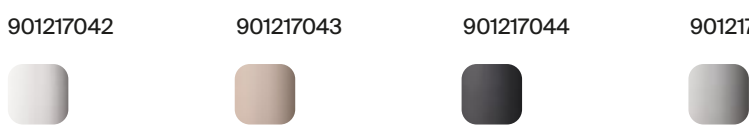

901227042	901227043	901227044	901227045
-----------	-----------	-----------	-----------


4000K	h500mm	10W@230V	723lm 220-240V
-------	--------	----------	----------------



h800mm





3000K	h800mm	10W@230V	689lm 220-240V
901217052	901217053	901217054	901217055

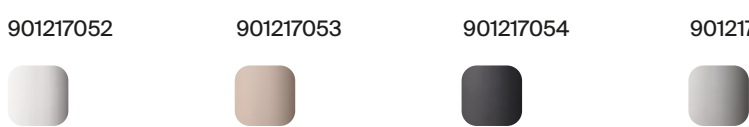

901227052	901227053	901227054	901227055
-----------	-----------	-----------	-----------

4000K	h800mm	10W@230V	723lm 220-240V
-------	--------	----------	----------------





ACCESSORIES

180° SHIELD

9044



2 WAY TERMINAL BLOCK IP68

9004



3-4 WAY TERMINAL BLOCK IP68

9005

