

TALON WALL

32°

mono



solid
white



Ibiza sand



meteor
grey



timeless
aluminium



Wall mounting luminaire.
EN47100 die-cast aluminium
base and extruded structure,
single or double emission.
Powder polyester coated on
treated layer to prevent
corrosion,

available in four standard
colours.

Characterized by retrofit optics
and low luminance shield and
tempered transparent

silkscreened glass for Power
Led model and sandblasted for
Mid Power Led, mechanically
fixed with silicon glue.

IP gel connector Kit and inox
fixing clamp included.

Integrated Power Supply 220-
240V 50/60Hz

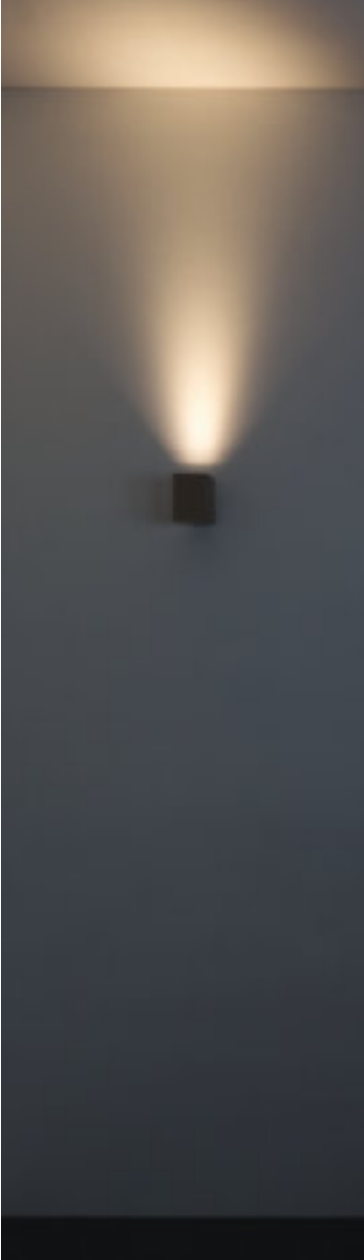
Light source (8,2W led) Power
Led / (5,7W led) Mid Power Led
CRI≥80 3000K/4000K





Power (5,8W e - 10,7W e - 11W e
-19,3W e)

BEAMS 32°

CLASS I

IP65



| | | | | | |
|---|---|--|---|-------|----------|
| 3000K | 32° | 8,2W _{led} | 10,7W _e | 800lm | 220-240V |
| 901111042 | 901111043 | 901111044 | 901111045 | | |
|  |  |  |  | | |
| 901121042 | 901121043 | 901121044 | 901121045 | | |
| 4000K | 32° | 8,2W _{led} | 10,7W _e | 840lm | 220-240V |

