

TALON WALL

19°-32°-65° - diffused

mono and bidirectional



solid
white



Ibiza sand



meteor
grey



timeless
aluminium



Wall mounting luminaire.
EN47100 die-cast aluminium
base and extruded structure,
single or double emission.
Powder polyester coated on
treated layer to prevent
corrosion,

available in four standard
colours.

Characterized by retrofit optics
and low luminance shield and
tempered transparent

silkscreened glass for Power
Led model and sandblasted for
Mid Power Led, mechanically
fixed with silicon glue.

IP gel connector Kit and inox
fixing clamp included.

Integrated Power Supply 220-
240V 50/60Hz

Light source (8,2W led) Power
Led / (5,7W led) Mid Power Led
CRI≥80 3000K/4000K

Power (5,8W e - 10,7W e - 11W e
-19,3W e)

BEAMS 19°-30°-55° DIFFUSED

CLASS I

IP65







3000K 19° 8,2W_{led} x2 19,3W_e 796lm x2 220-240V

901111002 901111003 901111004 901111005



901121002 901121003 901121004 901121005

4000K 19° 8,2W_{led} x2 19,3W_e 836lm x2 220-240V

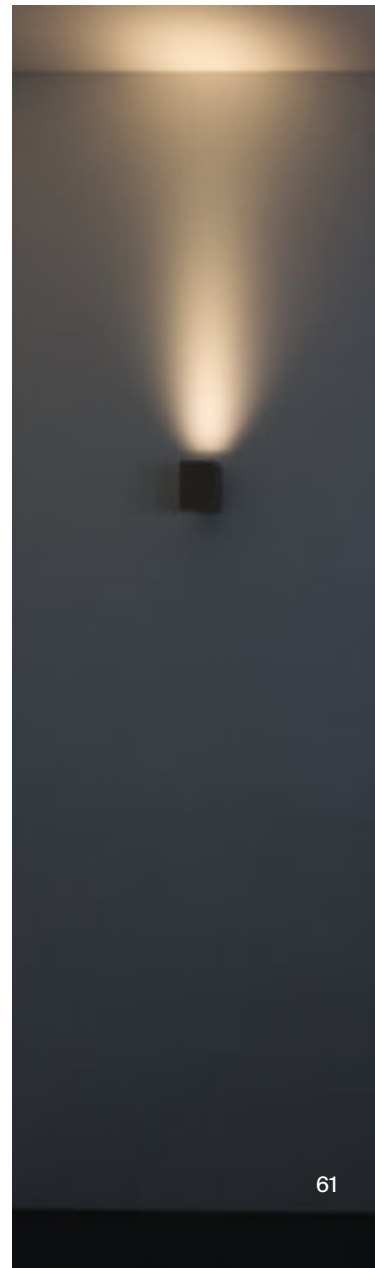


3000K 19° 8,2W_{led} 10,7W_e 796lm 220-240V

901111032 901111033 901111034 901111035



901121032 901121033 901121034 901121035

4000K 19° 8,2W_{led} 10,7W_e 836lm 220-240V

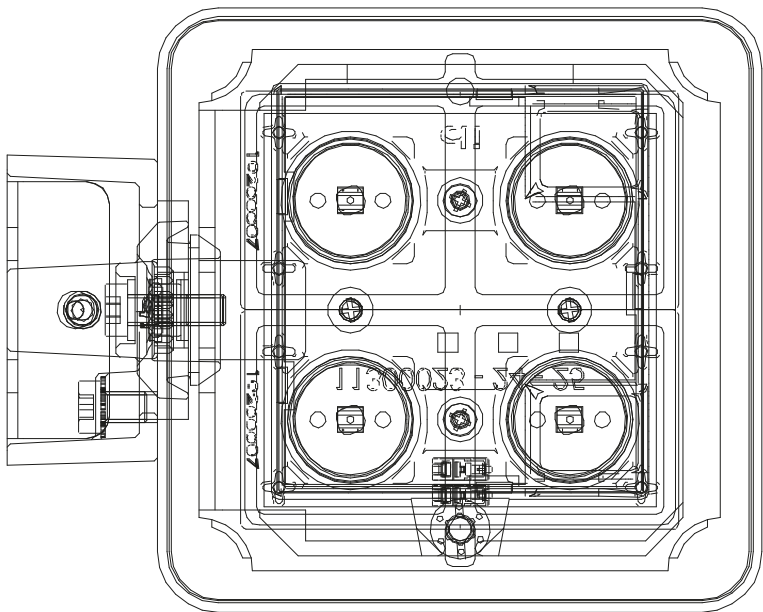



3000K 32° 8,2W_{led} x2 19,3W_e 800lmx2 220-240V

901111012

901111013

901111014

901111015



901121012

901121013

901121014

901121015

4000K





32°

8,2W_{led} x2

19,3W_e

840lmx2

220-240V

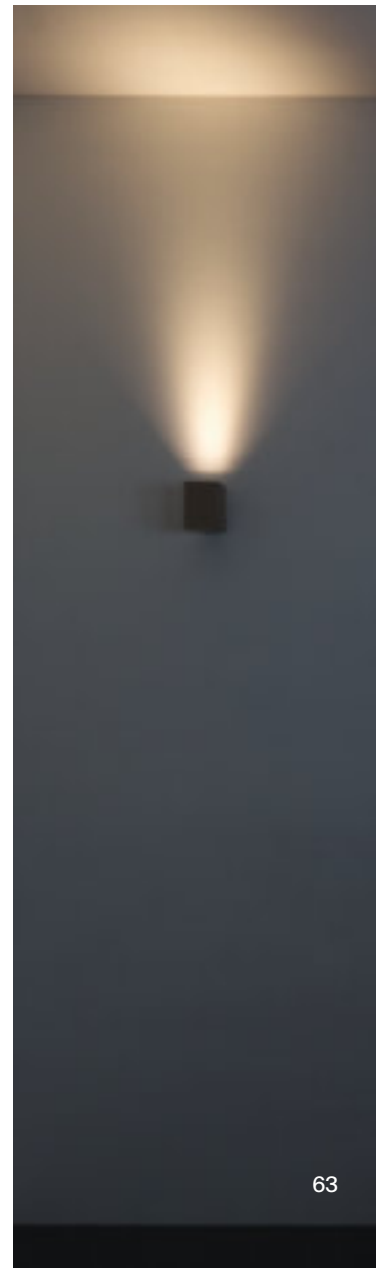

3000K 32° 8,2W_{led} 10,7W_e 800lm 220-240V

901111042

901111043

901111044

901111045



901121042

901121043

901121044

901121045

4000K

32°

8,2W_{led}

10,7W_e





840lm

220-240V





3000K	65°	8,2W _{led} x2	19,3W _e	760lmx2	220-240V
901111022	901111023	901111024	901111025		
					
901121022	901121023	901121024	901121025		
4000K	65°	8,2W _{led} x2	19,3W _e	798lmx2	220-240V

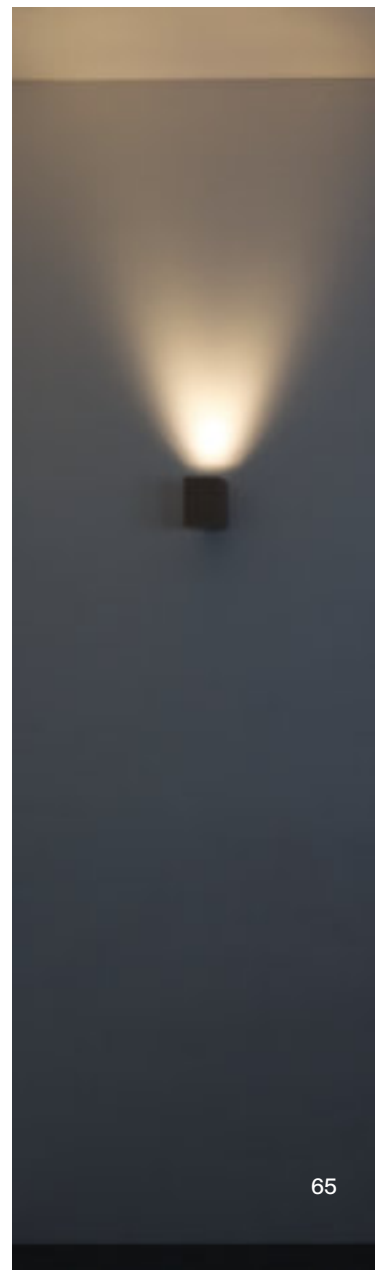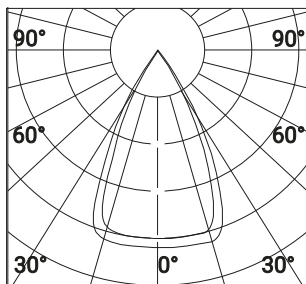

3000K	65°	8,2W _{led}	10,7W _e	760lm	220-240V
901111052	901111053	901111054	901111055		
					
901121052	901121053	901121054	901121055		
4000K	65°	8,2W _{led}	10,7W _e	798lm	220-240V









3000K diffused 4,8W_{led} x2 11W_e 506lmx2 220-240V

90111112 90111113 90111114 90111115



90112112 90112113 90112114 90112115

4000K diffused 4,8W_{led} x2 11W_e 531lmx2 220-240V

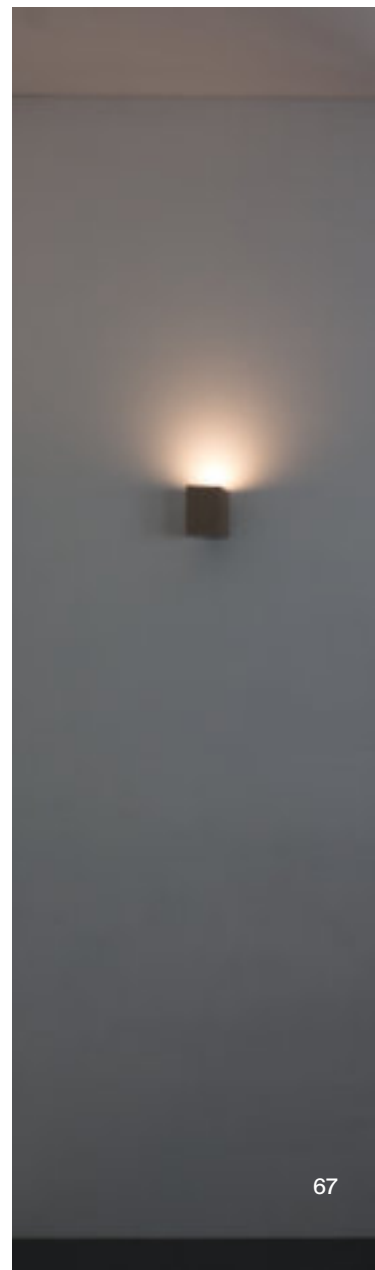

3000K diffused 4,8W_{led} 5,8W_e 506lm 220-240V

901111102 901111103 901111104 901111105



901121102 901121103 901121104 901121105

4000K diffused 4,8W_{led} 5,8W_e 531lm 220-240V